


Power Feedthru DN35CF/1000V

Power Feedthru DN35CF Flange, 1000V 1, 2, 4 and 8 Pins

- ✚ Electrical Power Feedthru
- ✚ CF35 S/S Flange (2.75"CF)
- ✚ Alumina insulated conductors
- ✚ Rating 1000V DC, up to 15A
- ✚ UHV compatible
- ✚ Bakable to 450 °C


2-Pin Example



4-Pin Example



P/N	# of Pins	Amps/Pin	Pin Material	Pin Dia (F)	Vac side Pin Length (B)
DN35CF-1000V-1-Cu-K	1	15A	Cu	0.05"	2.5"
DN35CF-1000V-2-Cu-K	2	15A	Cu	0.05"	2.5"
DN35CF-1000V-2-Ni-K	2	5A	Ni	0.05"	2.5"
DN35CF-1000V-2-SS-K	2	1A	S/S	0.05"	1.87"
DN35CF-1000V-4-Cu-K	4	15A	Cu	0.05"	1.9"
DN35CF-1000V-4-Ni-K	4	5A	Ni	0.05"	1.87"
DN35CF-1000V-4-SS-K	4	1A	S/S	0.05"	1.87"
DN35CF-1000V-4-Ko-K	8	7A	Kovar	0.05"	4.0"

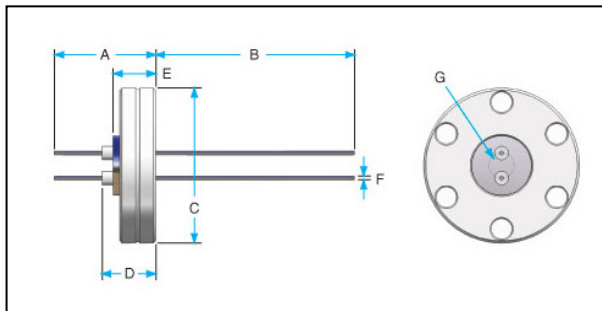

VIN KAROLA INSTRUMENTS

P.O. Box 922273
Norcross, GA 30010-2273
Tel: 770/409-1499
Fax: 770/447-8045
e-mail: info@vinkarola.com

Vin Karola reserves the right to make changes in Design, and specifications without notice or obligation.
© Vin Karola Instruments, 2003-2008